



SAFE & VAULT MANUFACTURERS

ATTACK RESISTANT DOORS

ANTI BANDIT PROTECTION

ENGINEERED FOR STRENGTH.

DESIGNED FOR PROTECTION.

Attack Resistant Doors are purpose built to protect people, property and assets from physical attack. Ideal for staff entrances, cash handling areas, banks and credit unions, retail and commercial, government facilities and high risk environments.



MODEL ARD4

FEATURES

-  Ballistic protection up to Level G3
-  High security locking systems
-  Bullet resistant view panels (optional)
-  Heavy duty steel construction
-  Custom sizes and finishes available
-  Proudly designed and owned



Door passes The Attack Test

Total attack time:
6 minutes (2 x 3
minute attacks)*

Dimensions*	Width mm	Height mm
Overall Dimensions	930	2095
Wall Opening	940	2105

*Custom-made sizes available.



SAFE & VAULT MANUFACTURERS

ATTACK RESISTANT DOORS

ANTI BANDIT PROTECTION

SPECIFICATIONS

FRAME: 100 x 50 x 3mm rectangular tubing. Rebates are 32 x 20mm rectangular tubing and are attached to the frame by means of counter sunk cap screws.

DOOR: Steel, Bullet Resistant Steel and Laminate High Density Chip Board finish available. Steel thickness varies according to the required ballistic rating of the door.

OPTIONAL LOCKING: Restricted Key, Dead Lock, Electric Strike, Multiple Locking Systems... and more.

HINGES: "ROTON" continuous hinges as standard equipment.


VIEW PANEL (OPTIONAL): Bullet Resistant Glass available: **G1** - 28mm, **G2** - 38mm, **G3** - 53mm. Standard view panel size: 250mm x 500mm. **Custom-made sizes available.**

BALLISTIC:

G1 Up to and including 9mm Parabellum.

G2 Up to and including .357 Magnum and 12g Shotgun, firing buckshot.

G3 Up to and including AK47 and 12g Shotgun, firing Brenneke slugs.

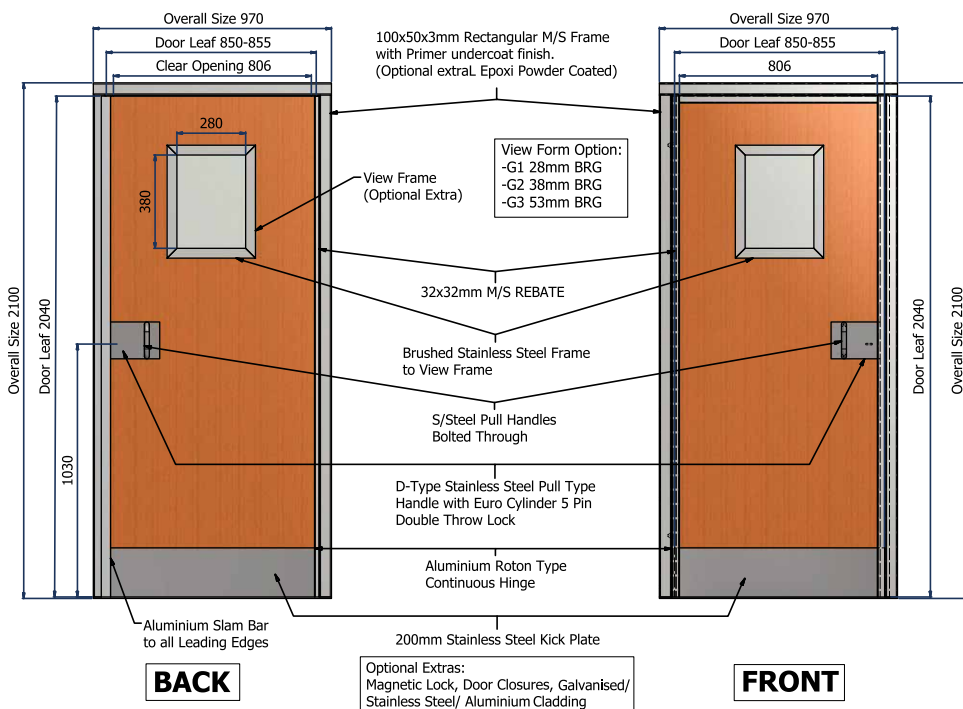

*ATTACK TEST & RESULTS

Tested to withstand the following attack:

Intruder Resistant (IR) Door Test Level of attack resistance required:

- IR Door to withstand 2 x separate continuous attacks for a total duration of 3 minutes each.
- Attack focused on the door locking mechanism and the door hinges.

Attack Tools:

- 10LB Sledgehammer
- 610mm Wrecking Bar

TEST 1 - Wrecking Bar Test:


Wrecking Bar attack on door lock, hinges, top and bottom of door - **3 minutes.**

TEST 2 - Sledgehammer Test:

Sledgehammer attacks on door lock and hinges - **3 minutes.**

Test Method

- IR Door to be installed into steel frame.
- Target area of attack to be identified and marked on the door to act as a reference for the attack.
- 3 x Attackers perform a continuous attack with each attacker taking turns in quick succession to ensure that maximum attack force is placed on the test door for the timed duration of the attack.
- Test to be recorded on video. Video of attack to be recorded and provided as evidence of the test result.

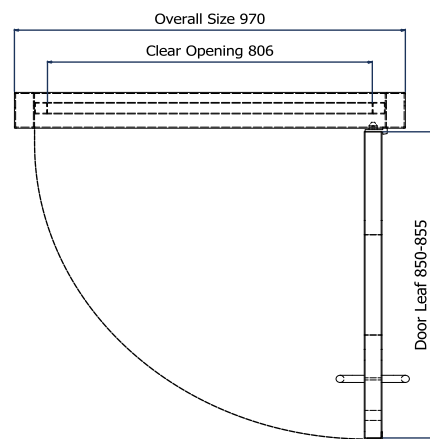

ALL CMI SAFES COME WITH A FIVE YEAR WARRANTY, EXCLUDING FREIGHT AND TRAVELLING, WITH A 24 MONTH WARRANTY ON LOCKS.

CMI Safe Co

ABN | 35 664 874 766

02 9547 1488

sales@cmisafe.com.au

244 West St | Carlton | NSW | 2218

www.cmisafe.com.au



SYDNEY AUSTRALIA

CD DZ 01000 240726